




OIL-HYDRAULIC BENT PUMP AXIAL PISTONS

Ref.
BI M IA1

Main Dimensions

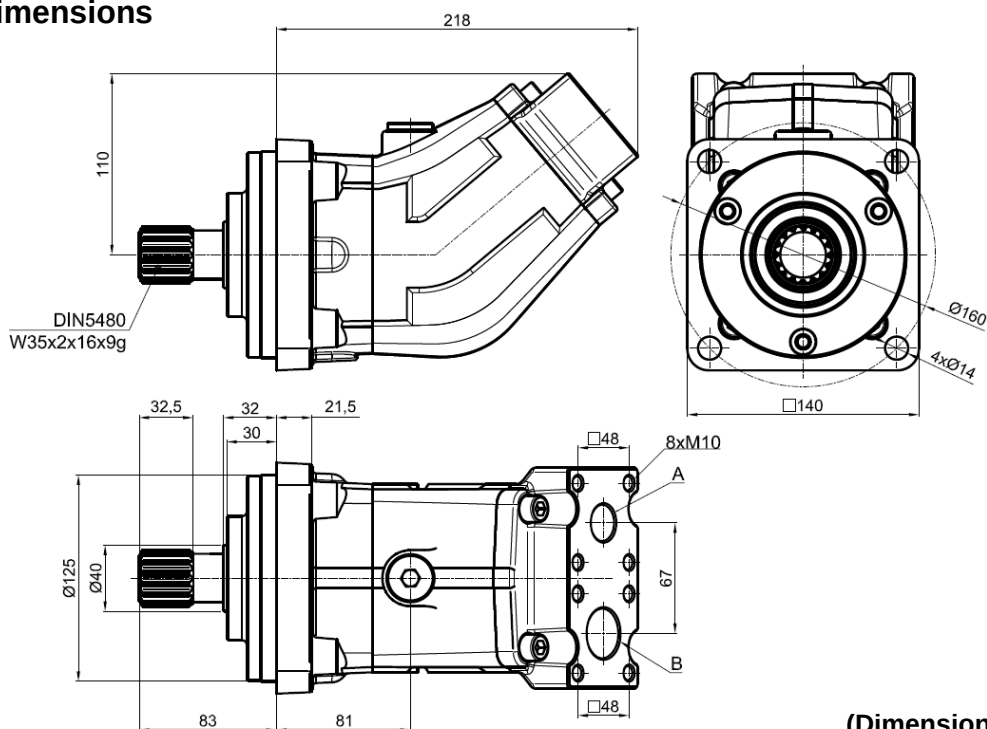

(Dimensions in mm)

Main Data

Pumps BI	50M5IA1	60M7IA1	80M7IA1
Displacement (cm ³ /rot.)	50	60	81
Operating pressure (bar) (up to)	350	350	300
Peak pressure (bar)	400	400	350
Operating rotation ¹ (rpm)	2100	1900	1800
Max. rotation without load ¹ (rpm)	2400	2200	2000
Weight (approx.) (kg)	12	12	12
Pistons quantity	5	7	7
A-Oil outlet (mm)	Ø22	Ø22	Ø22
B-Oil inlet (mm)	Ø30	Ø30	Ø30

How to order:

Example: Pump 60cm³/rot; operating pressure up to 350 bar; peak pressure 400 bar, ref. BI M IA1 → BI60M7IA1

Fluids	mineral oils type ISO HM or DIN 51524-2 HLP
Recommended viscosity range	20 to 40 cSt (mm ² /s) at working temperature
Limits viscosity range	10 to 750 cSt (mm ² /s)
Start-up viscosity range, without load	750 to 1500 cSt (mm ² /s)
Filtration	10µm ISO4406 18/13
Inlet pressure range	0,8 to 2 bar abs

In the application of any of these pumps; the use of these data does not exempt the reading of the instruction "BI pumps recommendations before start-up"

¹ These values are valid at an absolute pressure of 1 bar in suction port when operating with a mineral oil at a viscosity of 30 mm²/s (cSt).

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown



ABER - Embraiagens e Comandos Hidráulicos - A. B. LDA

Rua Francisco de Almeida, Nº 30 – Vila Nova da Telha – 4470 MAIA - Portugal


Telephone: +7 495 7870189 mob: +7 926 3545382 e-mail: info@aber.com.ru <http://www.aber.com.ru>




OIL-HYDRAULIC BENT PUMP AXIAL PISTONS

Ref.
BI M IA1

**Diagram
Flow - Speed**

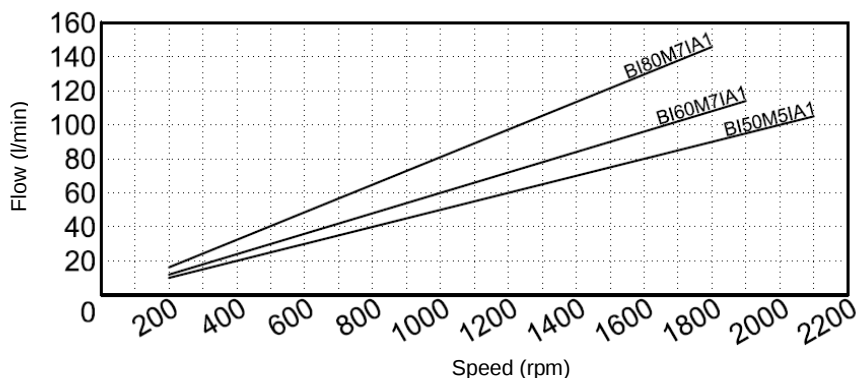

**Diagram
Input Power - Flow – Pressure**

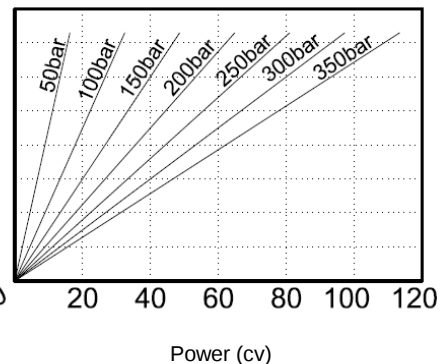

Hose dimensions

Inlet Hose	
Flow (l/min)	Internal pipe diameter (inch)
30-40	1"1/4
50-60	1"1/2
70-90	1"3/4
100-120	2"
130-150	2"1/4

Outlet Hose					
Flow (l/min)	Internal pipe diameter (inch)				
	1/2"	1/2"	1/2"	1/2"	1/2"
30	1/2"	1/2"	1/2"	1/2"	1/2"
40	5/8"	1/2"	1/2"	1/2"	1/2"
50	5/8"	5/8"	5/8"	1/2"	1/2"
60	3/4"	5/8"	5/8"	5/8"	5/8"
70	1"	3/4"	3/4"	5/8"	5/8"
80	1"	3/4"	3/4"	3/4"	3/4"
90	1"	1"	1"	3/4"	3/4"
100	1"	1"	1"	1"	3/4"
110	1"	1"	1"	1"	1"
120	1"	1"	1"	1"	1"
130	1"	1"	1"	1"	1"
140	1"1/4	1"	1"	1"	1"
150	1"1/4	1"	1"	1"	1"
P (bar)					
50-100		100-150	150-200	200-300	300-350

Important notes:

-To install one of these pumps, please consult and respect the instruction "BI pumps recommendations before start-up".

ABER is constantly engaged in improving its products and, therefore, reserves itself the right to modify without any further notice the characteristics shown



ABER - Embraiaçens e Comandos Hidráulicos - A. B. LDA
Rua Francisco de Almeida, Nº 30 – Vila Nova da Telha – 4470 MAIA - Portugal
Telephone: +7 495 7870189 mob: +7 926 3545382 e-mail: info@aber.com.ru <http://www.aber.com.ru>